


LC/APC to ST/UPC 9/125 Singlemode Duplex Fiber Patch Cables

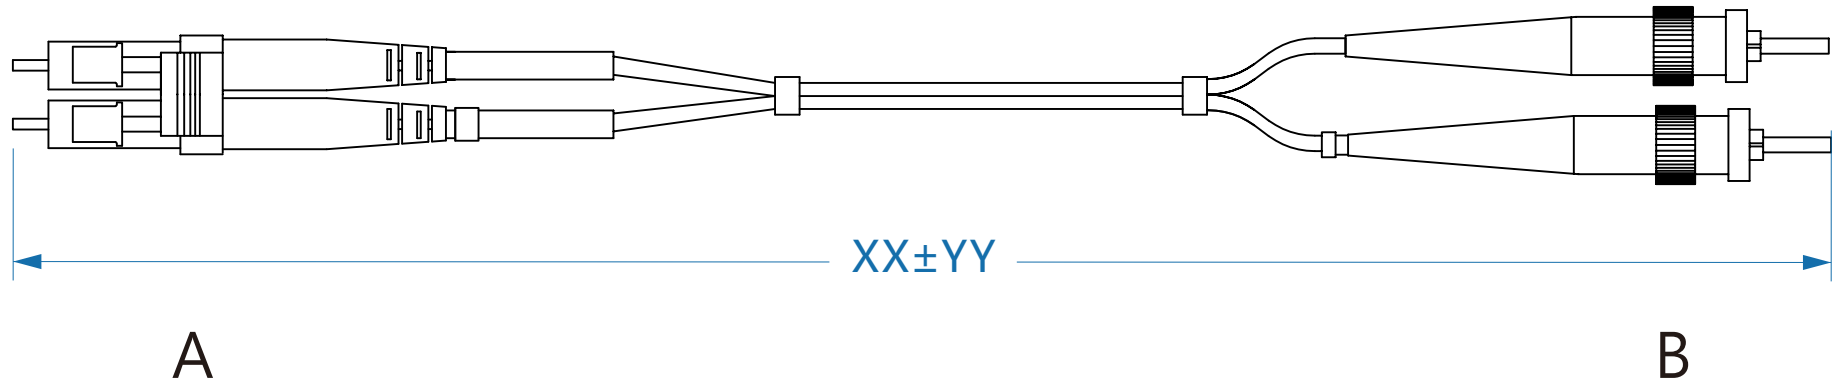

XX	YY
XX≤1M	YY±50MM
XX>1M	YY±100MM

1. Connector A: LC/APC SM
Connector B: ST/UPC SM
2. Cable Type: Duplex ϕ 2.0mm Singlemode 9/125um
3. Length: X (Unit: Meter)
4. Jacket Color: Yellow
5. Insertion Loss(IL): $\leq 0.20\text{dB}$ (PC/UPC) $\leq 0.30\text{dB}$ (PC/APC)
6. Return Loss(RL): PC $\geq 50\text{dB}$ UPC $\geq 55\text{dB}$ APC $\geq 65\text{dB}$
7. Maximum Attenuation: 0.4/0.3 dB/km (1310/1550)
8. Min Bending Radius: 6cm (Loaded), 4cm (Unloaded)
9. Operating Temperature: -20 Centigrade to +70 Centigrade
10. Storage Temperature: -40 Centigrade to +85 Centigrade
11. Packing: Each cable packed in a zip-lock polybag
12. Standards: TIA/EIA-568B.3
GR-326-CORE

RoHS

PART NO.	30-303-XX				
TITLE	LC/APC-ST/UPC 9/125 Singlemode Duplex Fiber Cables				
SCALE	NOT SCALE	REV.	A		
DRAWER	LEO	UNIT	Meter		
CHECKED	RAYMOND				
APPROVED	TOM				