


SC/APC to SC/UPC 9/125 Singlemode Duplex Fiber Patch Cables

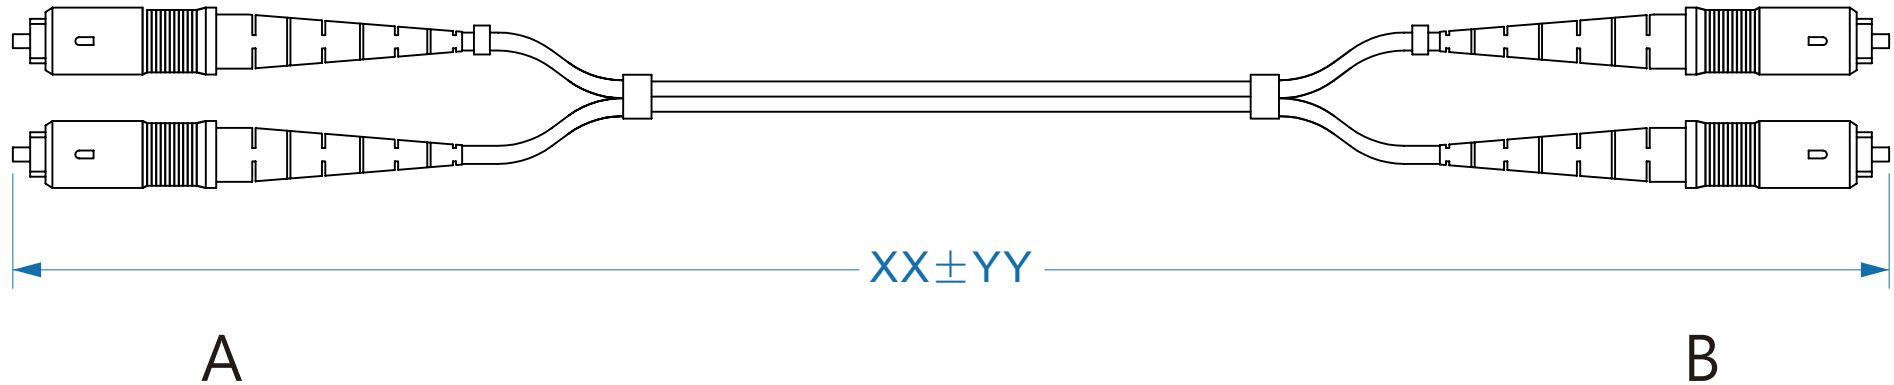

XX	YY
$XX \leq 1M$	$YY \pm 50MM$
$XX > 1M$	$YY \pm 100MM$

1. Connector A: SC/APC SM
Connector B: SC/UPC SM
2. Cable Type: Duplex $\phi 2.0mm$ Singlemode 9/125um
3. Length: X (Unit: Meter)
4. Jacket Color: Yellow
5. Insertion Loss(IL): $\leq 0.20dB(PC/UPC)$ $\leq 0.30dB(PC/APC)$
6. Return Loss(RL): PC $\geq 50dB$ UPC $\geq 55dB$ APC $\geq 65dB$
7. Maximum Attenuation: 0.4/0.3 dB/km (1310/1550)
8. Min Bending Radius: 6cm (Loaded), 4cm (Unloaded)
9. Operating Temperature: -20 Centigrade to +70 Centigrade
10. Storage Temperature: -40 Centigrade to +85 Centigrade
11. Packing: Each cable packed in a zip-lock polybag
12. Standards: TIA/EIA-568B.3
GR-326-CORE

RoHS

PART NO.	30-306-XX				
TITLE	SC/APC-SC/UPC 9/125 Singlemode Duplex Fiber Cables				
SCALE	NOT SCALE	REV.	A		
DRAWER	LEO	UNIT	Meter		
CHECKED	RAYMOND				
APPROVED	TOM				