



NOTE:ALL MATERIAL COMPLIANT ROHS STANDARD

REVISION INFORMATION			
Rev.	Rev. Date	Modified By	Brief Description

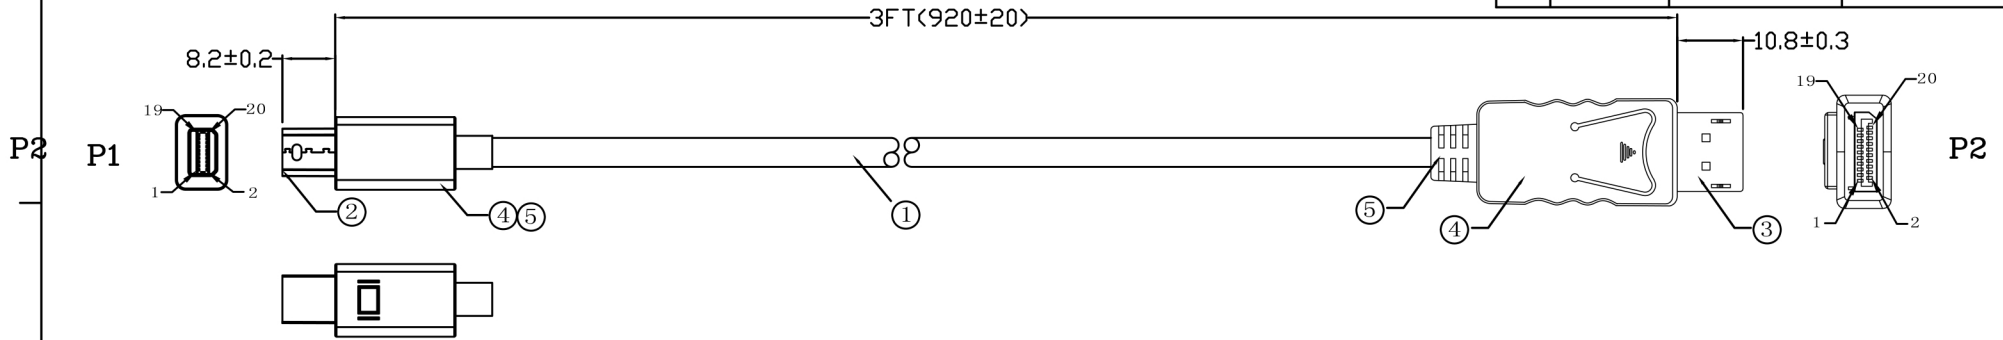

NOTE:

- CABLE: 32AWG (7/0.08TC*1P+DAM)*5P+32AWG (7/0.08TC)*5C+ADB (16/6/0.12 AL/Mg) PVC JACKET:BLACK OD:5.5±0.2mm
MARK: DisplayPort Cable Exxxxxx AWM STYLE 20276 80°C 30V VW-1
- CONNECTORS:
DP (M) Plug, CONTACT:GOLD PLATED 1U", SHELL: NICKEL PLATED INSULATION:BLACK.
MINI DP (M) Plug, CONTACT:GOLD PLATED 1U", SHELL: NICKEL PLATED INSULATION:WHITE.
- ELECTUONICAL TEST:
(1).100% OPEN SHORT & MISS WIRE TEST
(2).INSULATION: DC 300V/0.01s 10Mohm Min
(3).CONTACTOR RESISTANCE: 2 ohm
- ROHS compliant

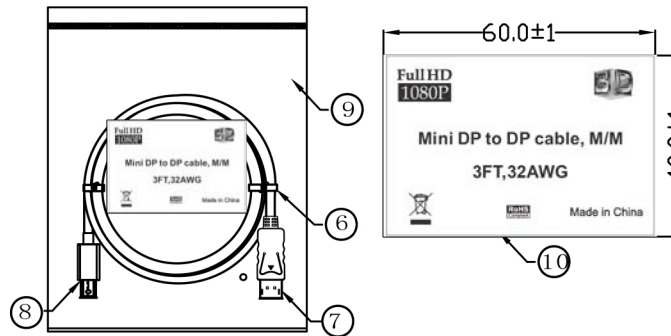

PIN OUT

P1	Wire Color	P2	SIGNAL NAME
1	D.W	11	GND
3		12	ML_Lane 0 (p)
5		10	ML_Lane 0 (n)
7	D.W	8	GND
9		9	ML_Lane 1 (p)
11		7	ML_Lane 1 (n)
13	D.W	5	GND
15		6	ML_Lane 2 (p)
17		4	ML_Lane 2 (n)
19		19	GND
2		18	Hot Plug Detect
4		13	CONFIG 1
6		14	CONFIG 2
8	D.W	2	GND
10		3	ML_Lane 3 (p)
12		1	ML_Lane 3 (n)
14	D.W	16	GND
16		15	AUX_CH (p)
18		17	AUX_CH (n)
SHELL	D.W	SHELL	

NO.	PART NAME	SPECIFICATION DESCRIPTION	QTY	UNIT
①	Label	HKDP911B/Z-U026,3FT copperplate paper Size: 60*40mm Lable Customer No.184010	1	PCS
②	PE Bag	SIZE:180*210*T0.08mm	1	PCS
③	CAP	MINI DisplayPor Male Dust Cover	1	PCS
④	CAP	DisplayPort Male Dust Cover	1	PCS
⑤	TIE	L=100MM	2	PCS
⑥	PVC	BLACK PVC 60P	0.008	KG
⑦	PE	PE:LDPE NATURE	0.008	KG
⑧	DP CONN	DP Male Plug Pin Gold Plated 1U",Shell Nickel Plated Insulation Black ABS Hood	1	SET
⑨	MINI DP CONN	MINI DP Male Plug Pin Gold Plated 1u",Shell Nickel Plated Insulation White	1	SET
⑩	CABLE	32AWG (7/0.08TC*1P+DAM)*5P+32AWG (7/0.08TC)*5C+ADB (16/6/0.12 AL/Mg) PVC JACKET:BLACK OD:5.5±0.2mm	0.92	M

an INFINIT brand

DRAWN BY <i>Jane</i>	DATE: 2014.06.03	Title:Mini DisplayPort Male to DisplayPort Male
CHECKED BY	SHEET 1 of 1	Part No: 40-610-XXX
APPROVED BY	SCALE NONE	REV.00 UNIT:mm