




THE INFORMATION CONTAINED IN THIS DRAWING IS THE SOLE PROPERTY OF SHOW ME CABLES, INC. ANY REPRODUCTION IN PART OR WHOLE WITHOUT THE WRITTEN PERMISSION OF SHOW ME CABLES, INC. IS PROHIBITED.

REVISIONS			
REV	DESCRIPTION	DATE	APPROVED
A	INITIAL RELEASE	04/08/2021	GUTTA DAURO

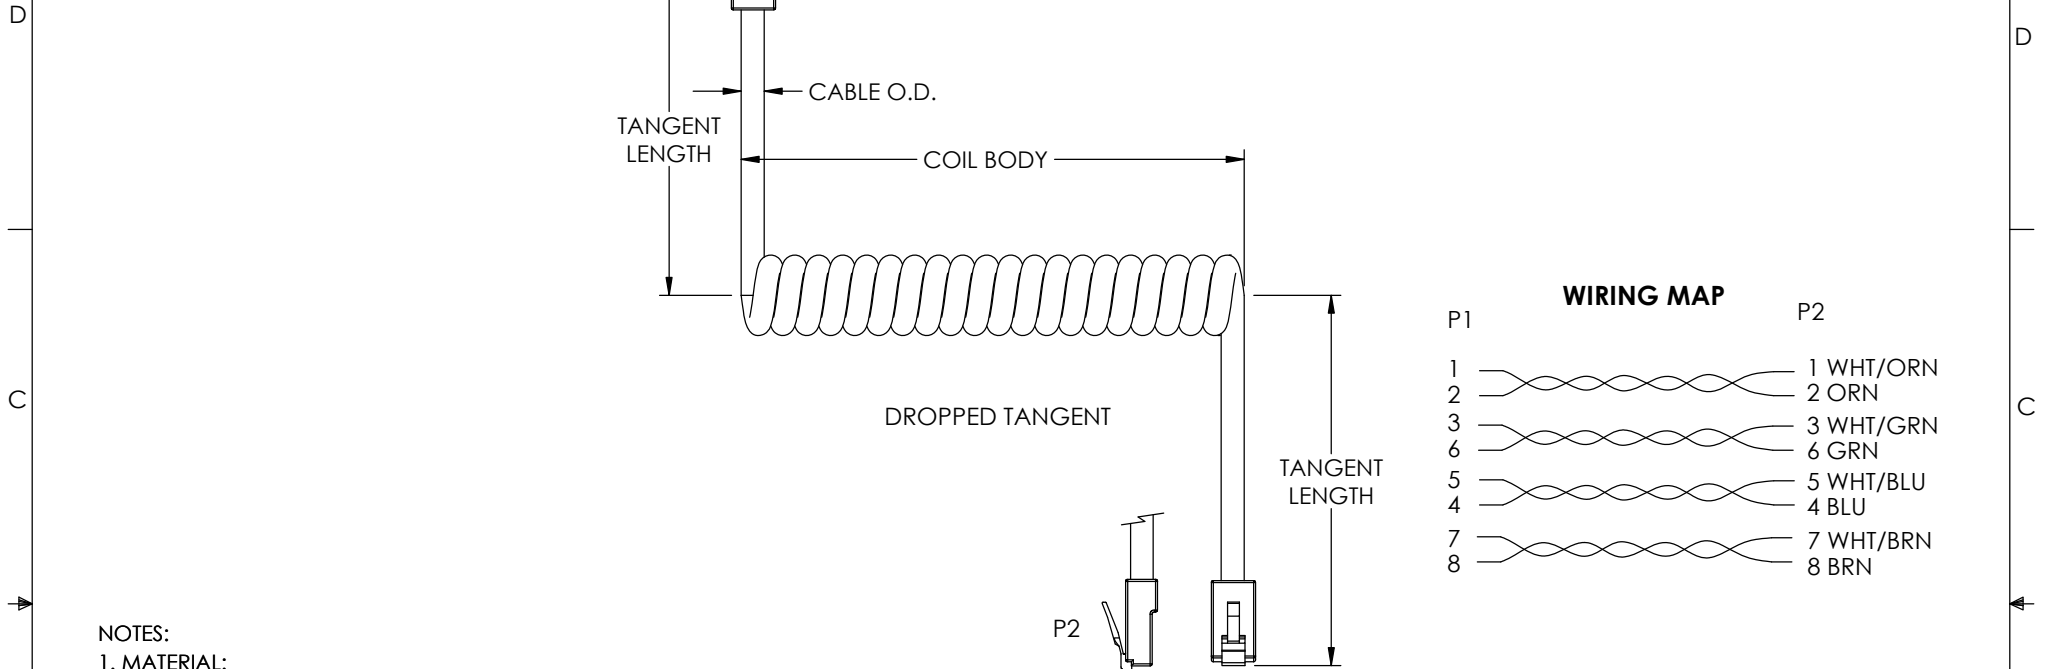

- NOTES:**
- MATERIAL:**  
 PLUG HOUSING: POLYCARBONATE, CLEAR, UL94V-0  
 CONTACTS: PHOSPHOR BRONZE  
 CABLE JACKET: POLYURETHANE, BLACK
  - FINISH:**  
 CONTACTS: 50 μINCHES GOLD IN CONTACT AREA OVER  
 100 μINCHES NICKEL PLATE OVERALL
  - CABLE CHARACTERISTICS:**  
 CAT5e COIL CORD UTP HIGH FLEX POLYURETHANE  
 3x EXPANSION LENGTH DROPPED TANGENT  
 UNSHIELDED (4) TWISTED PAIRS TWISTED TOGETHER  
 26AWG STRANDED TINNED COPPER CONDUCTORS  
 JACKET: .040" NOM. WALL THICKNESS (PRESSURE) OVERALL DIAMETER .240" NOM.
  - MISCELLANEOUS:**  
 OPERATING TEMPERATURE RANGE: -20°C TO 60°C  
 CABLE ASSEMBLY TO BE TESTED FOR CONTINUITY.  
 CABLE ASSEMBLY TO BE INDIVIDUALLY PACKAGED.
  - ALL DIMENSIONS ARE FOR REFERENCE ONLY**

PART NUMBER	CABLE O.D.	COIL BODY LENGTH	MAX TANGENT LENGTHS	MAX EXPANDED COIL LENGTH
5C90-0.5F	.240	0.5 FEET	0.5 FEET	1.5 FEET
5C90-1F	.240	1 FEET	0.5 FEET	3 FEET
5C90-2F	.240	2 FEET	0.5 FEET	6 FEET
5C90-3F	.240	3 FEET	0.5 FEET	9 FEET
5C90-4F	.240	4 FEET	0.5 FEET	12 FEET
5C90-5F	.240	5 FEET	0.5 FEET	15 FEET
5C90-6F	.240	6 FEET	0.5 FEET	18 FEET
5C90-7F	.240	7 FEET	0.5 FEET	21 FEET
5C90-8F	.240	8 FEET	0.5 FEET	24 FEET

UNLESS OTHERWISE SPECIFIED, DIMENSIONS ARE IN INCHES [mm] OVERALL CABLE LENGTH TOLERANCE: ≤12 [305] = +1 [25] / -0 >12 [305] ≤60 [1524] = +2 [51] / -0 >60 [1524] ≤120 [3048] = +4 [102] / -0 >120 [3048] ≤300 [7620] = +6 [152] / -0 >300 [7620] = +5% / -0 ALL OTHER DIMENSIONAL TOLERANCES: .X = ± .2 [5]   FRACTIONS ± 1/32 .XX = ± .02 [.5]   ANGLES ± 1° .XXX = ± .005 [.13]	APPROVALS DRAWN BY: BPUCHASKI CHECKED BY: DFRISIELLO APPROVED BY: GUTTA DAURO	DATE 04/08/2021 04/08/2021 04/08/2021	 115 Chesterfield Industrial Blvd., Chesterfield, MO 63005 Phone: 1.888.519.9505 Fax: 1.888.519.9515 CATEGORY <b>TELECOM MODULAR</b>
	CONFIGURATION DETAILS OF UNDIMENSIONED FEATURES MAY VARY COLOR VARIATIONS MAY OCCUR	PRODUCT DESCRIPTION <b>CAT5e COIL CORD UTP HF PUR 3X DT</b>	
THIRD-ANGLE PROJECTION 	SIZE <b>A</b> CAGE CODE <b>3SVT8</b> ITEM NO. <b>5C90-X</b>	SCALE: NONE CAD FILE: 5C90-X.SLDDRW	REV. <b>A</b> SHEET 1 OF 1