



REVISION INFORMATION			
Rev.	Rev. Date	Modified By	Brief Description
A/0	2017.09.21	LM	NEW

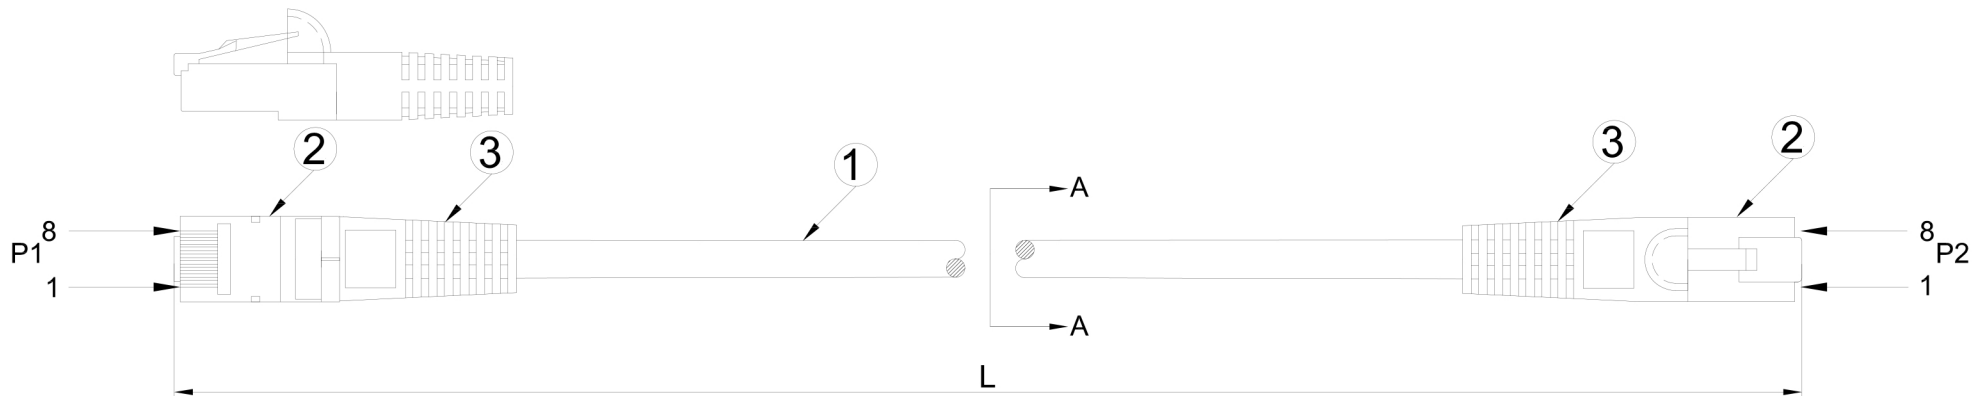

INK MARKING: YFC CAT.6 26AWGX4PR SSTP IEC 60332.1 PATCH CABLE - CONFORM TO ISO/IEC 11801 & EN 50288 & ANSI/TIA-568-C.2 3P/ETL VERIFIED ▲ CMX(UL) C(UL) CMH E164469-XX

conductor resistance: 152↓(Ω/Km)at20°C

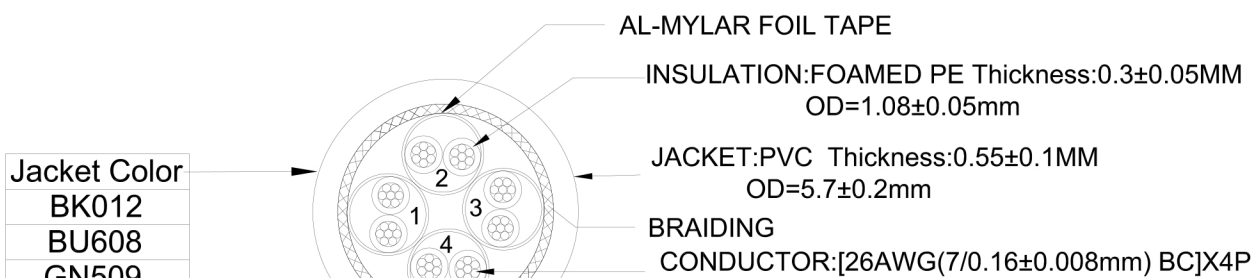

Jacket Color
BK012
BU608
GN509
GY177
OR307
RD220
PU720
RD210
WH928
YE406

orange 1	green 2
white/orange	white/green
blue 3	brown 4
white/blue	white/brown

PINOUT		
P1	WIRE	P2
1	WHITE/ORANGE	1
2	ORANGE	2
3	WHITE/GREEN	3
6	GREEN	6
4	BLUE	4
5	WHITE/BLUE	5
7	WHITE/BROWN	7
8	BROWN	8
shell	Braid	shell

L(ft)	T(inch)	T(%)	L(ft)	T(inch)	T(%)
0.5	±0.6	10%	25	±4	1.33%
1	±1.2	10%	35	±6	1.43%
2	±1.2	5%	40	±6	1.25%
3	±1.2	3.33%	50	±6	1.0%
4	±1.2	2.5%	60	±6	0.83%
5	±1.2	2%	75	±6	0.67%
6	±1.2	1.67%	85	±6	0.59%
7	±2	2.38%	100	±6	0.5%
10	±2	1.67%	110	±6	0.45%
13	±2	1.28%	120	±6	0.42%
15	±3.15	1.75%	125	±6	0.4%
16	±3.15	1.64%	150	±6	0.33%
20	±4	1.67%	175	±6	0.29%
			200	±6	0.25%



③	MOLD	PVC YUS-07	2	PCS
②	PLUG	8P8C 50U RJ45 SHIELDED	2	PCS
①	CABLE	CAT.6 SSTP PVC 26AWG*4P BC	1	PC
NO.	PART NAME	SPECIFICATION DESCRIPTION	QTY	UNIT

DRAWN BY LM	DATE: 2017/09/21	DESCRIPTION: LAN PATCH C6 SSTP 26AWG 4P
CHECKED BY JZY	SHEET 1 of 1	ITEM NO. 10081XX 10082XX 10083XX 10084XX
APPROVED BY Lander	SCALE 1:1	REV. 00 UNIT:mm