



WIRING MAP

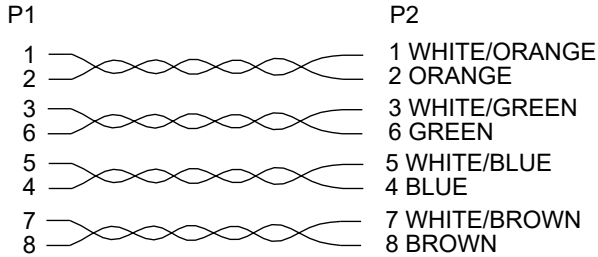

REVISION					
ZONE	REV	DESCRIPTION	DATE	CHANGED BY	APPROVED
	A	INITIAL RELEASE	01/15/2024	HBAKKE	GUTTADAURO

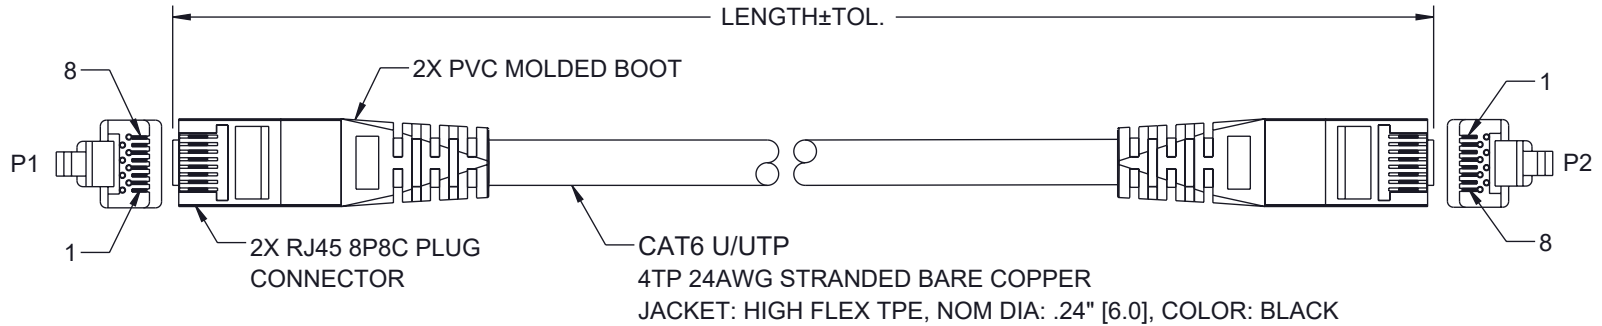

NOTES:

PHYSICAL:

- CONDUCTOR TYPE: 24AWG, STRANDED BC
- INSULATION: HDPE
- CONDUCTOR DIA: 0.95±0.05mm
- CONNECTOR CONTACT MATERIAL: COPPER ALLOY, 50µ" GOLD PLATED
- MINIMUM AVERAGE CABLE THICKNESS: .024 [0.60].

ELECTRICAL:

- BANDWIDTH: 250 MHz
- VOLTAGE RATING: 30 V
- CONDUCTOR DC RESISTANCE: 11.25Ω/100m (MAXIMUM)
- IMPEDANCE: 100Ω
- CAPACITANCE: 5600pf/100m
- PROPAGATION DELAY: 545ns/100m (MAXIMUM)
- DELAY SKEW: 45ns/100m (MAXIMUM)
- PASS FLUKE DSX 8000 CHANNEL TEST

ENVIRONMENTAL:

- INSTALLATION TEMPERATURE RATING: 0°C TO +50°C
- OPERATING TEMPERATURE RATING: -20°C TO +75°C

MISCELLANEOUS:

- CABLE ASSEMBLY TO BE TESTED FOR CONTINUITY.
- CABLE ASSEMBLY SHALL BE INDIVIDUALLY PACKAGED.

REGULATORY COMPLIANCE:

EU RoHS DIRECTIVE (MOST RECENTLY RELEASED VERSION).

THE INFORMATION CONTAINED IN THIS DRAWING IS THE SOLE PROPERTY OF INFINITE ELECTRONICS, INC. ANY REPRODUCTION IN PART OR WHOLE WITHOUT THE WRITTEN PERMISSION OF INFINITE ELECTRONICS, INC. IS PROHIBITED. THESE COMMODITIES, TECHNOLOGY OR SOFTWARE WERE EXPORTED FROM THE UNITED STATES IN ACCORDANCE WITH THE EXPORT ADMINISTRATION REGULATIONS. DIVERSION CONTRARY TO U.S. LAW PROHIBITED.

ITEM NUMBER	LENGTH [TOL.]	
	FEET [IN]	METERS [mm]
624HFO-TB-1F	1.00 [+1.38/- .59]	0.30 [+35/-15]
624HFO-TB-2F	2.00 [+1.38/- .59]	0.61 [+35/-15]
624HFO-TB-3F	3.00 [+1.38/- .59]	0.91 [+35/-15]
624HFO-TB-5F	5.00 [+1.38/- .79]	1.52 [+35/-20]
624HFO-TB-7F	7.00 [+1.38/-1.18]	2.13 [+35/-30]
624HFO-TB-10F	10.00 [+1.38/-1.18]	3.05 [+35/-30]
624HFO-TB-15F	15.00 [+1.38/-1.18]	4.57 [+35/-30]
624HFO-TB-25F	25.00 [±2.36]	7.62 [±60]
624HFO-TB-50F	50.00 [±3.15]	15.24 [±80]
624HFO-TB-70F	70.00 [±3.15]	21.34 [±80]
624HFO-TB-100F	100.00 [±3.15]	30.48 [±80]

UNLESS OTHERWISE SPECIFIED LEADING DIMENSIONS ARE INCHES DIMENSIONS IN [] ARE MILLIMETERS

TOLERANCES:

X = ±.2 [5]	FRACTIONS ± 1/32
.XX = ±.02 [0.5]	ANGLES ± 1°
.XXX = ±.005 [0.13]	

CABLE LENGTH TOLERANCES:

≤12 [305] = +1 [25] / -0
>12 [305] ≤ 60 [1524] = +2 [51] / -0
>60 [1524] ≤ 120 [3048] = +4 [102] / -0
>120 [3048] ≤ 300 [7620] = +6 [152] / -0
>300 [7620] = +5% / -0

ALL DIMENSIONS ARE FOR REFERENCE ONLY AND SUBJECT TO CHANGE WITHOUT NOTICE. UN-DIMENSIONED/NON-CRITICAL FEATURES MAY VARY IN SIZE AND LOCATION. COLORS MAY VARY

an INFINIT® brand

Website: www.ShowMeCables.com
Phone: 1.888.519.9505

INTERPRET ALL DIMENSIONS AND TOLERANCES PER ASME Y14.5

SCALE	SHEET
NONE	1 OF 1

DESCRIPTION				
CAT 6 ETHERNET CABLE, U/UTP 24AWG, HIGH FLEX TPE JACKET, BLACK				
SIZE	CAGE CODE	DRAWN BY	ITEM NO.	REV
A	3SVT8	HBAKKE	624HFO-TB	A