



THE INFORMATION CONTAINED IN THIS DRAWING IS THE SOLE PROPERTY OF SHOW ME CABLES, INC. ANY REPRODUCTION IN PART OR WHOLE WITHOUT THE WRITTEN PERMISSION OF SHOW ME CABLES, INC. IS PROHIBITED.

REVISIONS			
REV	DESCRIPTION	DATE	APPROVED
A	INITIAL RELEASE	18-03-2021	GUTTADAURO

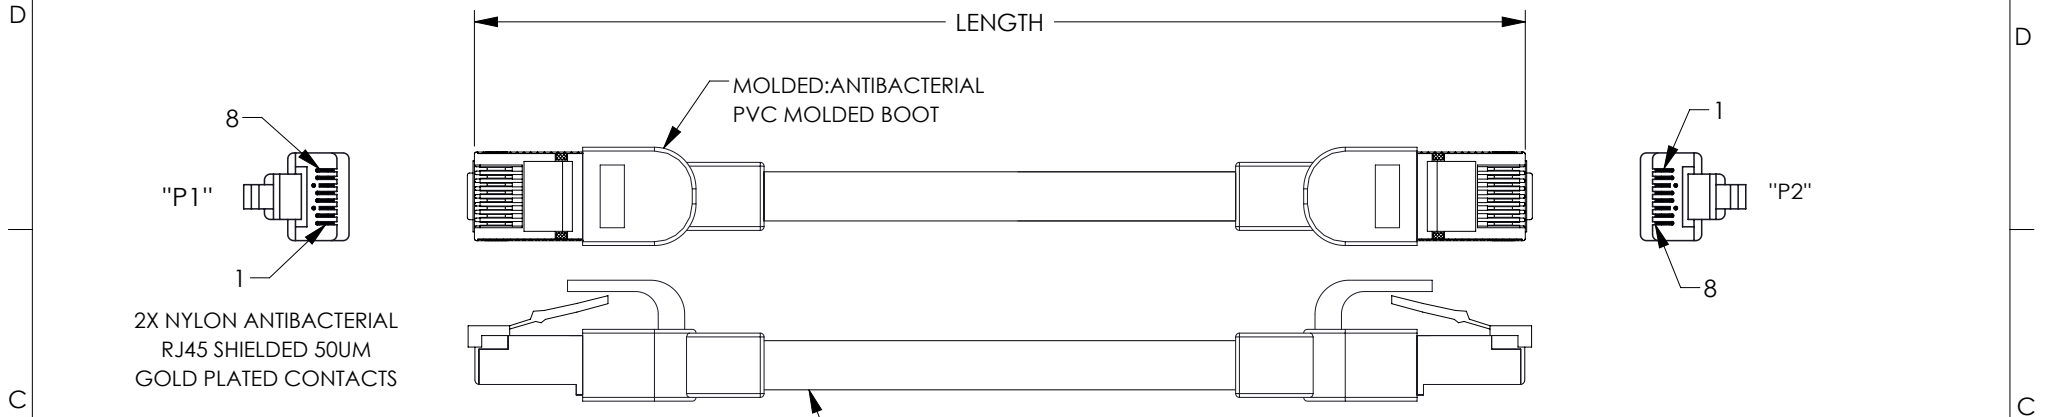

WIRING MAP

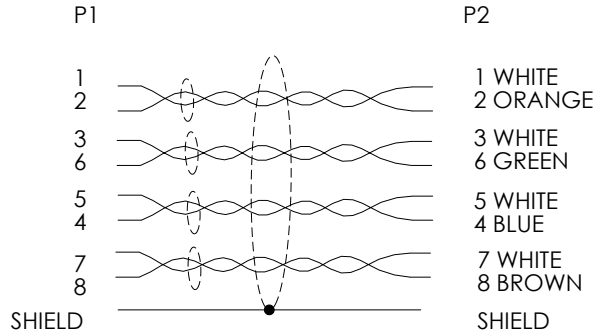

Cat 6a. FOUR TWISTED PAIR, STRANDED BARE COPPER
S/FTP ALUM/POLY SHIELDED PAIRS AND OVERALL BRAID.
CONDUCTOR TYPE - 26AWG(7/0.16±0.008MM), STRANDED BC
INSULATION - FOPE
CABLE JACKET: ANTIBACTERIAL PVC/LSZH
TEMPERATURE RATING -20°C TO +75°C.
VOLTAGE RATING - 30V.
WIRING SCHEME -TIA568B.

PART NUMBER	LENGTH FEET [METERS]
696A-0.5 WH	0.5 [0.15]
696A-01 WH	1.0 [0.30]
696A-02 WH	2.0 [0.60]
696A-03 WH	3.0 [0.91]
696A-05 WH	5.0 [1.52]
696A-07 WH	7.0 [2.13]
696A-10 WH	10.0 [3.04]
696A-15 WH	15.0 [4.57]
696A-20 WH	20.0 [6.09]
696A-25 WH	25.0 [7.62]
696A-50 WH	50.0 [15.24]
696A-60 WH	60.0 [18.28]
696A-70 WH	70.0 [21.33]
696A-80 WH	80.0 [24.38]
696A-100 WH	100.0 [30.48]

NOTES:

ANTIBACTERIAL TEST METHOD:

ISO 22196:2011 MEASUREMENT OF ANTIBACTERIAL ACTIVITY ON PLASTICS AND OTHER NON-POROUS SURFACES.

TEST ORGANISM:

ESCHERICHIA COLI ATCC 8738
STAPHYLOCOCCUS AUREUS ATCC 6538P

ANTIBACTERIAL ACTIVITY RATE:

ESCHERICHIA COLI > 99.9%
STAPHYLOCOCCUS AUREUS > 99.9%

MISCELLANEOUS:

CABLE ASSEMBLY TO BE TESTED FOR CONTINUITY.
CABLE ASSEMBLY TO BE INDIVIDUALLY PACKAGED.

<p>UNLESS OTHERWISE SPECIFIED, DIMENSIONS ARE IN INCHES [mm]</p> <p>OVERALL CABLE LENGTH TOLERANCE: ≤ 12 [305] = +1 [25] / -0 > 12 [305] ≤ 60 [1524] = +2 [51] / -0 > 60 [1524] ≤ 120 [3048] = +4 [102] / -0 > 120 [3048] ≤ 300 [7620] = +6 [152] / -0 > 300 [7620] = +5% / -0</p> <p>ALL OTHER DIMENSIONAL TOLERANCES: .X = ± .2 [5] FRACTIONS ± 1/32 .XX = ± .02 [.5] ANGLES ± 1° .XXX = ± .005 [.13]</p> <p>THIRD-ANGLE PROJECTION</p>	<p>APPROVALS</p> <p>DATE</p>	<p>Show Me CABLES an INFINIT® brand</p>	<p>115 Chesterfield Industrial Blvd., Chesterfield, MO 63005 Phone: 1.888.519.9505 Fax: 1.888.519.9515</p>	
	<p>DRAWN BY MVEERAPPAN</p> <p>CHECKED BY SPAN</p> <p>APPROVED BY GUTTADAURO</p>			<p>DATE</p> <p>18-03-2021</p> <p>18-03-2021</p> <p>18-03-2021</p>
	<p>CONFIGURATION DETAILS OF UNDIMENSIONED FEATURES MAY VARY</p> <p>COLOR VARIATIONS MAY OCCUR</p>	<p>SCALE: NONE</p>	<p>CATEGORY</p> <p>TELECOM/MODULAR</p>	<p>PRODUCT DESCRIPTION</p> <p>Cat6A Antibacterial S/FTP RJ45 26STR CMLSZH WHT</p>
	<p>SIZE A</p> <p>CAGE CODE 3SVT8</p>	<p>ITEM NO. 696A-XX WH</p>	<p>REV. A</p>	<p>CAD FILE: 696A-XX WH.SLDDRW</p> <p>SHEET 1 OF 1</p>