

6

5



4

3

2


1

REVISION					
ZONE	REV	DESCRIPTION	DATE	CHANGED BY	APPROVED
	A	INITIAL RELEASE	02/01/2024	SREITER	GUTTADAURO

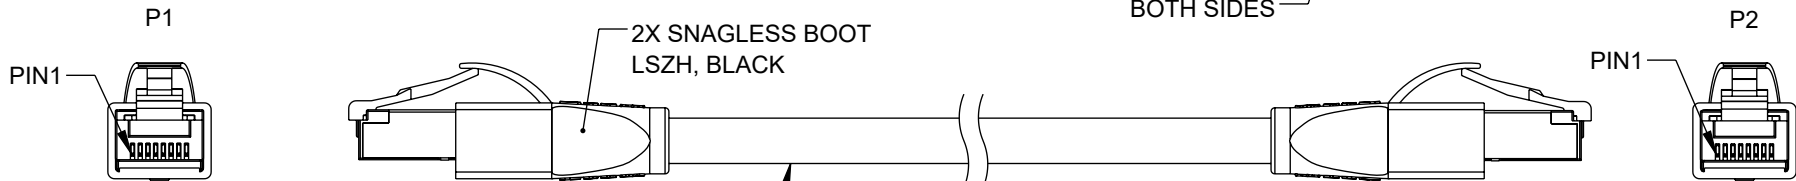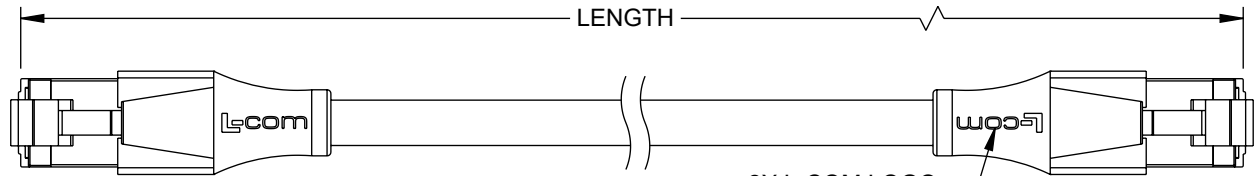

2X RJ45 SHIELDED PLUG  
GOLD PLATED CONTACTS

CAT 7 SHIELDED MODULAR CABLE  
FOUR TWISTED PAIR WITH ALUMINUM/ POLYESTER FOIL SHIELDING OF EACH PAIR  
CONDUCTORS: 26 AWG STRANDED COPPER  
OVERALL SHIELD: TINNED COPPER BRAID  
JACKET: PVC, COLOR: GRAY, NOM. DIA. .236 [6.0]  
(OPERATING TEMPERATURE: -10 °C TO +80 °C; VOLTAGE RATING: 30V)

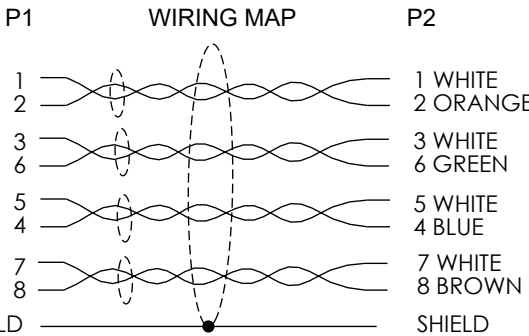

PART NUMBER	LENGTH METERS[FEET]
726-0.5 GY	0.5[1.64]
726-01 GY	1.0[3.28]
726-02 GY	2.0[6.56]
726-03 GY	3.0[9.84]
726-05 GY	5.0[16.41]
726-7.5 GY	7.5[24.61]
726-10 GY	10.0[32.81]
726-15 GY	15.0[49.21]

- NOTES:
- 1.LENGTHS OVER 10 METERS (32.8 FT) ARE CHANNEL RATED.
  - 2.PLUG CONFORMS TO TIA-1096.
  - 3.CABLE ASSEMBLY TO BE TESTED FOR CONTINUITY.
  - 4.CABLE ASSEMBLY TO BE INDIVIDUALLY PACKAGED IN ACCORDANCE WITH L-COM SPECIFICATION PS-0031.

THE INFORMATION CONTAINED IN THIS DRAWING IS THE SOLE PROPERTY OF INFINITE ELECTRONICS, INC. ANY REPRODUCTION IN PART OR WHOLE WITHOUT THE WRITTEN PERMISSION OF INFINITE ELECTRONICS, INC. IS PROHIBITED. THESE COMMODITIES, TECHNOLOGY OR SOFTWARE WERE EXPORTED FROM THE UNITED STATES IN ACCORDANCE WITH THE EXPORT ADMINISTRATION REGULATIONS. DIVERSION CONTRARY TO U.S. LAW PROHIBITED.

UNLESS OTHERWISE SPECIFIED LEADING DIMENSIONS ARE INCHES DIMENSIONS IN [ ] ARE MILLIMETERS

TOLERANCES:  
 .X = ±.2 [5]      FRACTIONS ± 1/32  
 .XX = ±.02 [0.5]      ANGLES ± 1°  
 .XXX = ±.005 [0.13]

CABLE LENGTH TOLERANCES:  
 ≤12 [305] = +1 [25] / -0  
 >12 [305] ≤ 60 [1524] = +2 [51] / -0  
 >60 [1524] ≤ 120 [3048] = +4 [102] / -0  
 >120 [3048] ≤ 300 [7620] = +6 [152] / -0  
 >300 [7620] = +5% / -0

ALL DIMENSIONS ARE FOR REFERENCE ONLY AND SUBJECT TO CHANGE WITHOUT NOTICE. UN-DIMENSIONED/NON-CRITICAL FEATURES MAY VARY IN SIZE AND LOCATION. COLORS MAY VARY

**Show Me**  
CABLES  
an INFINIT® brand

Website: [www.ShowMeCables.com](http://www.ShowMeCables.com)  
Phone: 1.888.519.9505

INTERPRET ALL DIMENSIONS AND TOLERANCES PER ASME Y14.5

SCALE: NONE      SHEET: 1 OF 1

DESCRIPTION CA,CAT7 S/FTP RJ45 TO RJ45 PVC JKT, GRY			
SIZE A	CAGE CODE 3SVT8	DRAWN BY SREITER	ITEM NO. 726-XX GY
			REV A

6

5

4

3

2

1