


THE INFORMATION CONTAINED IN THIS DRAWING IS THE SOLE PROPERTY OF SHOW ME CABLES, INC. ANY REPRODUCTION IN PART OR WHOLE WITHOUT THE WRITTEN PERMISSION OF SHOW ME CABLES, INC. IS PROHIBITED.

REVISIONS			
REV	DESCRIPTION	DATE	APPROVED
A	INITIAL RELEASE	03/04/2022	GUITADAURO

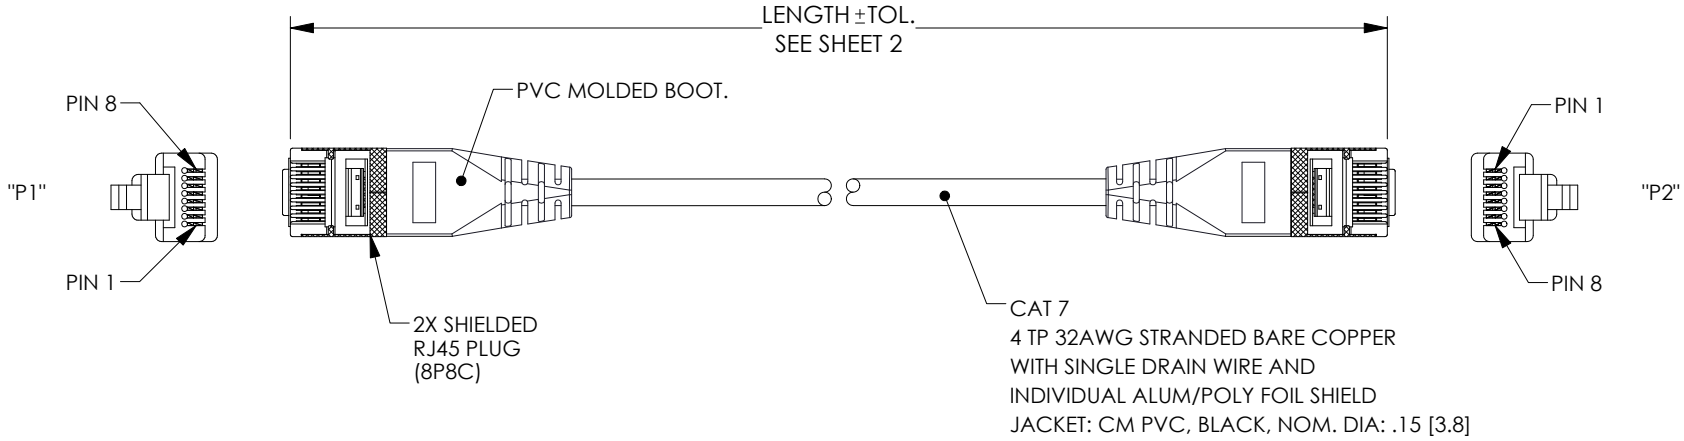

NOTES:

PHYSICAL CHARACTERISTICS:

- CABLE TYPE: CAT7 U/FTP
- TEMPERATURE RATING
 - INSTALLATION: 0°C~50°C
 - OPERATION: -20°C~60°C
- VOLTAGE RATING: 30V

MECHANICAL CHARACTERISTICS:

- CONTACT MATERIAL: COPPER ALLOY, 50U" GOLD PLATING

ELECTRICAL CHARACTERISTICS:

- CONDUCTOR DC RESISTANCE: 60.1Ω/100M (MAXIMUM)
- IMPEDANCE: 100Ω
- CAPACITANCE: 5600pf/100M
- PROPAGATION DELAY: 545ns/100M (MAXIMUM)
- DELAY SKEW: 45ns/100M (MAXIMUM)
- PASS FLUKE DSX 8000 CHANNEL TEST (5%TEST)
- BANDWIDTH: 600MHZ


MISCELLANEOUS:



- CABLE ASSEMBLY TO BE TESTED FOR CONTINUITY.
- CABLE ASSEMBLY SHALL BE INDIVIDUALLY PACKAGED.

REGULATORY COMPLIANCE:


EU RoHS DIRECTIVE (MOST RECENT RELEASED VERSION)

WIRING MAP

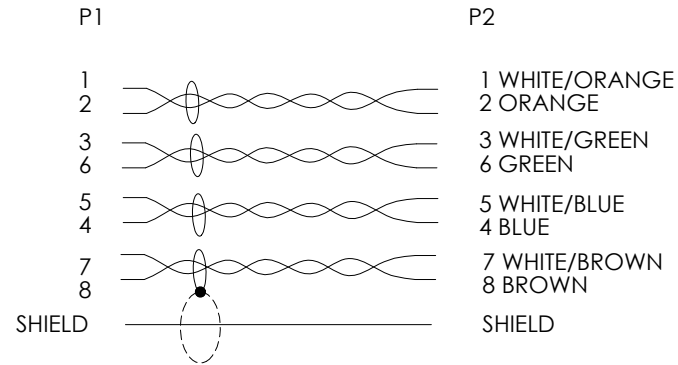

UNLESS OTHERWISE SPECIFIED, DIMENSIONS ARE IN INCHES [mm] OVERALL CABLE LENGTH TOLERANCE: ≤12 [305] = +1 [25] / -0 >12 [305] ≤60 [1524] = +2 [51] / -0 >60 [1524] ≤120 [3048] = +4 [102] / -0 >120 [3048] ≤300 [7620] = +6 [152] / -0 >300 [7620] = +5% / -0 ALL OTHER DIMENSIONAL TOLERANCES: .X = ± .2 [5] FRACTIONS ± 1/32 .XX = ± .02 [.5] ANGLES ± 1° .XXX = ± .005 [.13]	APPROVALS	DATE	 115 Chesterfield Industrial Blvd., Chesterfield, MO 63005 Phone: 1.888.519.9505 Fax: 1.888.519.9515
	DRAWN BY DFRISIELLO	03/04/2022	
	CHECKED BY DGUST	03/04/2022	TELECOM/MODULAR
	APPROVED BY GUITADAURO	03/04/2022	PRODUCT DESCRIPTION Category 7 Slim U/FTP 32AWG CM PVC
THIRD-ANGLE PROJECTION 	CONFIGURATION DETAILS OF UNDIMENSIONED FEATURES MAY VARY	COLOR VARIATIONS MAY OCCUR	SIZE A CAGE CODE 3SVT8 ITEM NO. 732S REV. A SCALE: NONE CAD FILE: 732S.SLDDRW SHEET 1 OF 2

PART NUMBER	COLOR	LENGTH FEET [METERS]	TOLERANCE INCH [mm]
732S-0.5 BL	BLUE	0.5 [0.15]	+1.38/-.59 [+35/-15]
732S-01 BL	BLUE	1.0 [0.30]	+1.38/-.59 [+35/-15]
732S-03 BL	BLUE	3.0 [0.91]	+1.38/-.59 [+35/-15]
732S-05 BL	BLUE	5.0 [1.52]	+1.38/-.79 [+35/-20]
732S-07 BL	BLUE	7.0 [2.13]	+1.38/-1.18 [+35/-30]
732S-10 BL	BLUE	10.0 [3.04]	+1.38/-1.18 [+35/-30]
732S-15 BL	BLUE	15.0 [4.57]	+1.38/-1.18 [+35/-30]
732S-25 BL	BLUE	25.0 [7.62]	± 2.36 [60]
732S-35 BL	BLUE	35.0 [9.14]	± 3.15 [80]
732S-50 BL	BLUE	50.0 [15.24]	± 3.15 [80]
732S-65 BL	BLUE	65.0 [19.81]	± 3.15 [80]

		115 Chesterfield Industrial Blvd., Chesterfield, MO 63005 Phone: 1.888.519.9505 Fax: 1.888.519.9515	
CATEGORY TELECOM/MODULAR			
PRODUCT DESCRIPTION Category 7 Slim U/FTP 32AWG CM PVC			
SIZE A	CAGE CODE 3SVT8	ITEM NO. 732S	REV. A
SCALE: NONE		CAD FILE: 732S.SLDDRW	
			SHEET 2 OF 2