


Product Photo

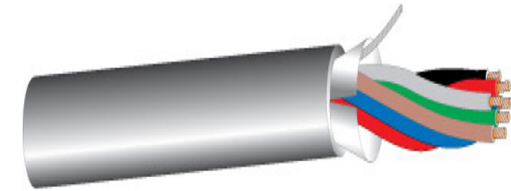

Construction & Dimensions

CONSTRUCTION & DIMENSIONS	-
CONDUCTOR PARAMETER	-
• Number of Conductors	6
• AWG Size	18
• Conductor Stranding	7x26
• Conductor Type	Bare Copper
• Nominal DCR	6.2 Ohm/1000ft
INSULATION PARAMETER	-
• Insulation Type	PVC
• Insulation Thickness	0.01 in
• Insulation Color Code	1.Black,2.Red,3.White,4.Green,5. Brown,6.Blue
SHIELDING PARAMETER	-
• Shield Type	Overall 100% Aluminum Foil
• Shield Type 2	Aquaseal Water Blocking Tape
• Drain Wire Type	Tinned Copper
• Drain Wire AWG	24 AWG
ELECTRICAL CHARACTERISTICS	-
• Nom. Cap. Between Conductors	68 pF/ft
• Nom. Cap. Conductor to Shield	122 pF/ft

Overall Construction

OVERALL CONSTRUCTION PARAMETERS	-
Jacket Type	UV Resistant PVC
Jacket Thickness	0.025 in
Nominal Cable O.D.	0.323 in
Plenum	No
NEC UL Rating	CM
RoHS Compliant	Yes
TIA Test	TIA455-82 Water Penetration Test
Bend Radius	2.907 in
Cable Weight	54 lbs

Overall Electrical & Optical Characteristics

OVERALL ELECTRICAL/OPTICAL CHARACTERISTICS	-
UL Flammability	UL1685
Operating Range	-20 to 60 Deg C
UL Voltage Rating	300



Show Me
CABLES
 an INFINITI® brand
www.showmecables.com
 888-519-9505 | sales@showmecables.com

Title	6 Conductor -18 AWG-Stranded - Shielded-Aqsl Water blocking Tape-PVC- Gray
Part Number	AQC3186GY

Notes
 1. Unless otherwise specified all dimensions are nominal
 2. All specifications are subject to change without notice at any time
 3. Dimensions are in millimeters