


THE INFORMATION CONTAINED IN THIS DRAWING IS THE SOLE PROPERTY OF L-COM, INC. ANY REPRODUCTION IN PART OR WHOLE WITHOUT THE WRITTEN PERMISSION OF L-COM, INC. IS PROHIBITED.

REVISIONS			
REV	DESCRIPTION	DATE	APPROVED
A	INITIAL RELEASE	07/09/2020	PHOSPODAR



PART NUMBER	FIBER MODE	JACKET TYPE	CONNECTOR POLISH	BOOT COLOR	JACKET COLOR	METERS [FEET]
FPT12-LCUSM-BL-3	9/125 SINGLE MODE OS2	OFNR (RISER) RATED	U (ULTRA)	BLUE	YELLOW	3.0 [9.84]
FPT12-LCASM-GR-3	9/125 SINGLE MODE OS2	OFNR (RISER) RATED	A (ANGLE)	GREEN	YELLOW	3.0 [9.84]
FPT12-LCUM3-AQ-3	50/125 MULTIMODE OM3	OFNR (RISER) RATED	U (ULTRA)	BLUE	AQUA	3.0 [9.84]

WIRING MAP	
FIBER #	SC COLOR
1	BLUE
2	ORANGE
3	GREEN
4	BROWN
5	GRAY
6	WHITE
7	RED
8	BLACK
9	YELLOW
10	PURPLE
11	ROSE
12	AQUA

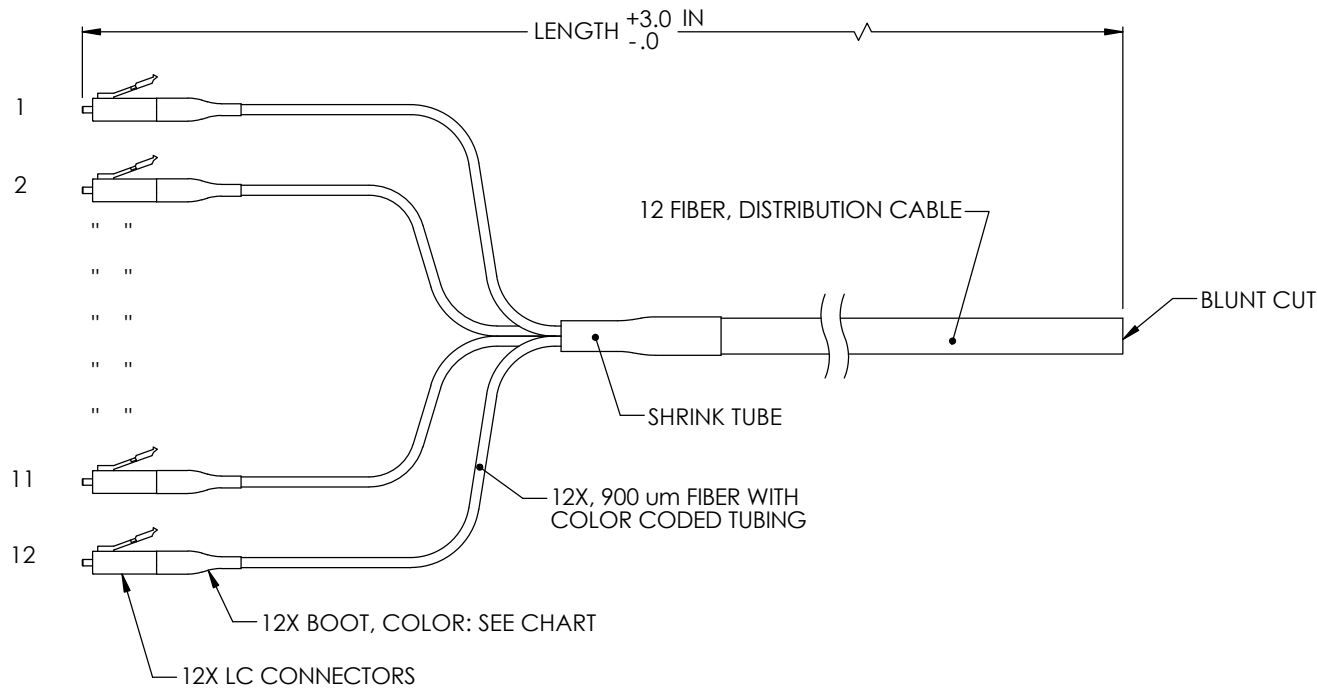

NOTES:

- SEE CHART FOR PART NUMBERS, FIBER MODES, JACKET TYPES, COLORS, AND LENGTHS.
- LC CONNECTOR ASSEMBLY POLISH TYPE: SEE CHART
- ALL CONNECTORS ACCOMPANIED WITH A DUST CAP INSTALLED (NOT SHOWN).
- CABLE ASSEMBLY SHALL BE INDIVIDUALLY PACKAGED IN ACCORDANCE WITH L-COM PACKAGING SPECIFICATION PS-0031.

UNLESS OTHERWISE SPECIFIED, DIMENSIONS ARE IN INCHES [mm]	APPROVALS	DATE	 50 High Street, West Mill, North Andover, MA 01845 USA. Phone: 1.800.341.5266 1.978.682.6936
	OVERALL CABLE LENGTH TOLERANCE: ≤12 [305] = +1 [25] / -0 >12 [305] ≤60 [1524] = +2 [51] / -0 >60 [1524] ≤120 [3048] = +4 [102] / -0 >120 [3048] ≤300 [7620] = +6 [152] / -0 >300 [7620] = +5% / -0	DRAWN BY DFRISIELLO	
ALL OTHER DIMENSIONAL TOLERANCES: .X = ± .2 [5] FRACTIONS ± 1/32 .XX = ± .02 [.5] ANGLES ± 1° .XXX = ± .005 [.13]	CHECKED BY PHOSPODAR	07/09/2020	CATEGORY FIBER OPTICS
	APPROVED BY PHOSPODAR	07/09/2020	
THIRD-ANGLE PROJECTION 	CONFIGURATION DETAILS OF UNDIMENSIONED FEATURES MAY VARY	COLOR VARIATIONS MAY OCCUR	SCALE: NONE CAD FILE: FPT12-LC.SLDDRW SHEET 1 OF 1
	SIZE A	CAGE CODE 43321	ITEM NO. FPT12-LC