



THE INFORMATION CONTAINED IN THIS DRAWING IS THE SOLE PROPERTY OF L-COM, INC. ANY REPRODUCTION IN PART OR WHOLE WITHOUT THE WRITTEN PERMISSION OF L-COM, INC. IS PROHIBITED.



REVISIONS			
REV	DESCRIPTION	DATE	APPROVED
A	INITIAL RELEASE	06/12/2020	PHOSPODAR

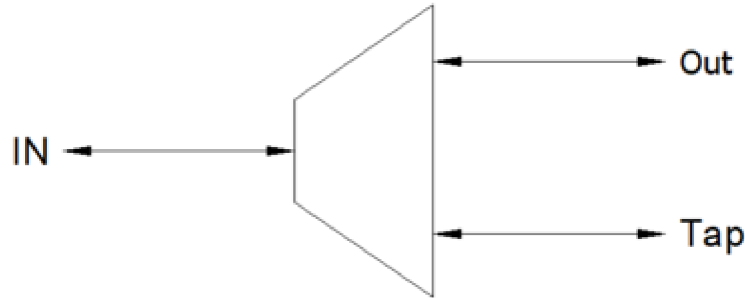

PARAMETER	SPECIFICATION	NOTES
PIGTAIL TYPE	G.657A1 OR EQUIVALENT	ALL PORTS
FIBER LENGTH	1~1.1m	ALL PORTS
FIBER TYPE	IN-250µm BARE FIBER, BLACK	
	OUT-250µm BARE FIBER, CLEAR	
	TAP-900µm, WHITE	
CONNECTOR TYPE	LC/UPC	TAP
	NC	IN/OUT

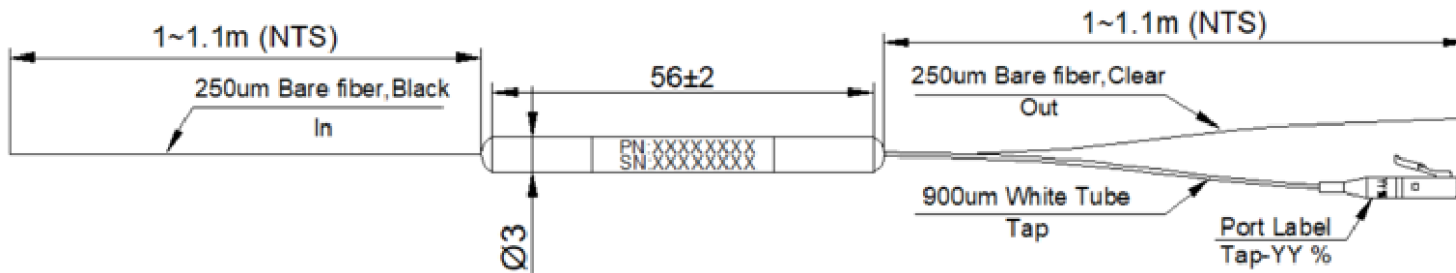

ITEM NUMBER	SPLIT	WAVELENGTHS	INSERTION LOSS PER SPLIT	PDL	RETURN LOSS	DIRECTIVITY
		nm	dB	dB	dB	dB
TAP-LCSM-5050-F	50/50	1310±40 1550±40	3.7/3.7	≤ 0.15	≥ 50	≥ 55
TAP-LCSM-6040-F	60/40		2.8/4.8			
TAP-LCSM-7030-F	70/30		2.0/6.1			
TAP-LCSM-9802-F	98/2		0.4/19			

UNLESS OTHERWISE SPECIFIED, DIMENSIONS ARE IN INCHES [mm] OVERALL CABLE LENGTH TOLERANCE: ≤12 [305] = +1 [25] / -0 >12 [305] ≤60 [1524] = +2 [51] / -0 >60 [1524] ≤120 [3048] = +4 [102] / -0 >120 [3048] ≤300 [7620] = +6 [152] / -0 >300 [7620] = +5% / -0 ALL OTHER DIMENSIONAL TOLERANCES: .X = ± .2 [5] FRACTIONS ± 1/32 .XX = ± .02 [5] ANGLES ± 1° .XXX = ± .005 [13]	APPROVALS DRAWN BY DZINN CHECKED BY BPUCHASKI APPROVED BY PHOSPODAR	DATE 06/12/2020 06/12/2020 06/12/2020	 an INFINITO® brand 50 High Street, West Mill, North Andover, MA 01845 USA. Phone: 1.800.341.5266 1.978.682.6936
	THIRD-ANGLE PROJECTION 	CONFIGURATION DETAILS OF UNDIMENSIONED FEATURES MAY VARY COLOR VARIATIONS MAY OCCUR	CATEGORY FIBER OPTIC
SIZE A	CAGE CODE 43321	ITEM NO. TAP-LCSM-xxxx-F	REV. A
SCALE: NONE		CAD FILE: TAP-LCSM-xxxx-F.SLDDRW	
SHEET 1 OF 1			